

Boiling water heater K5



Application areas

Boiling water supply:

- > Kitchen sink
- > Mobile kitchen
- > Kitchenettes in office / commercial areas




Boiling water heater K5

Product information



boiling >     **K5**

Part number:	4100-41002
Water connection (thread connection):	G ½"
Temperature range [°C]:	37 – 99
Boiling water content [litres / cups ¹⁾]:	≤ 5 / 30
Reheating time with complete filling ²⁾ [min]:	14.5
Nominal power rating [kW]:	2.0
Power supply:	1~ / N / PE 230 V AC
Protection class:	IP 44
Functional indicator:	✓
Housing:	Plastic / white
Water tank:	Plastic
Automatic boiling sensor:	✓
Length of swivel spout [cm]:	20
Dimensions (height × width × depth) [cm]:	27.0 × 29.3 × 19.8
Connecting cable:	 with plug
Weight (filled) [kg]:	7.5

1) Standard cup with 167 ml 2) At 10 °C cold water temperature

Description


- > Boiling water heater for preparing hot water from one cup up to 5 litres
- > Temperature range from approx. 37°C up to the boiling point (99°C)
- > Integrated fitting in the unit
- > Overflow integrated in the swivel spout
- > Automatic boiling sensor to maintain the water at boiling point
- > Safe wall installation
- > Ready to plug in

Boiling water heater K5 Installation



Assembly and operating instructions must be observed upon installation.

Dimensions in mm

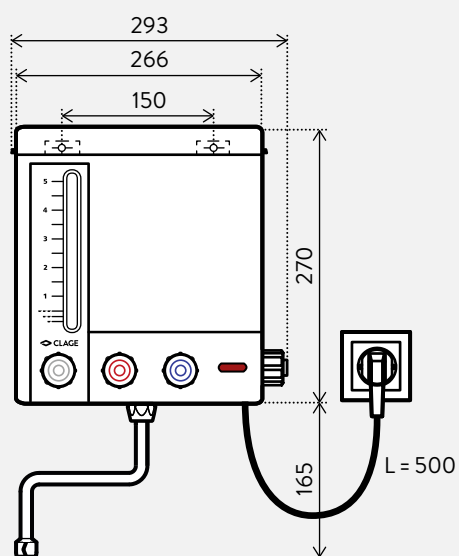

Side view:

