

# Storage water heater 5 litres S5-O



## Application areas

Single point supply:

- > Disposal sink
- > Washbasin
- > Kitchen sink



# Storage water heater 5 litres

## S5-O

### Product information



Energy efficiency class **A** (Scale: A+ to F) **S5-O (oversink model)**

Part number:	4100-41052
Content [litres]:	5
Type:	vented
Water connections (thread connections):	G½"
Temperature range [°C]:	approx. 35 – 85
approx. mixed water amount 40 °C at 65 °C <sup>1)</sup> [litres]:	9.1
Nominal power rating (kW):	2.0
Supply voltage [V]:	1~ / N / PE 230 V AC
Heating time $\Delta t = 55 \text{ K}$ <sup>2)</sup> [min]:	10
Standby power consumption at 65 °C [kWh / 24h]:	0.28
Internal tank:	plastic
Function indicator:	✓
Temperature limit adjustable to ... [°C]:	38 / 55 / 65
Protection class:	IP 24
Dimensions (height × width × depth) [cm]:	37.6 × 25.6 × 22.8
Power cable:	with plug
approx. weight filled with water [kg]:	8.5

1) At an inlet temperature of 12 °C 2) Temperature increase e.g. from 10 °C to 65 °C

#### Description

- > Vented 5-litre storage water heater (oversink model) for hot water supply at a single point-of-use
- > Temperature control approx. 35 °C bis 85 °C with available energy-saver range and optional temperature limitation at 38 °C, 55 °C or 65 °C
- > Can only be used with a special open-outlet tap for vented hot water heaters
- > Safety temperature limiter as dry-run protection
- > Internal tank of polypropylene with recyclable, thermal insulation
- > High-quality insulation keeps heat losses at a minimum
- > Automatic frost protection
- > Power cable with safety plug, length: 60 cm


# Storage water heater 5 litres S5-O Installation



Example of an **open-outlet** installation

Measurements in mm

Assembly and operating instructions must be observed upon installation.

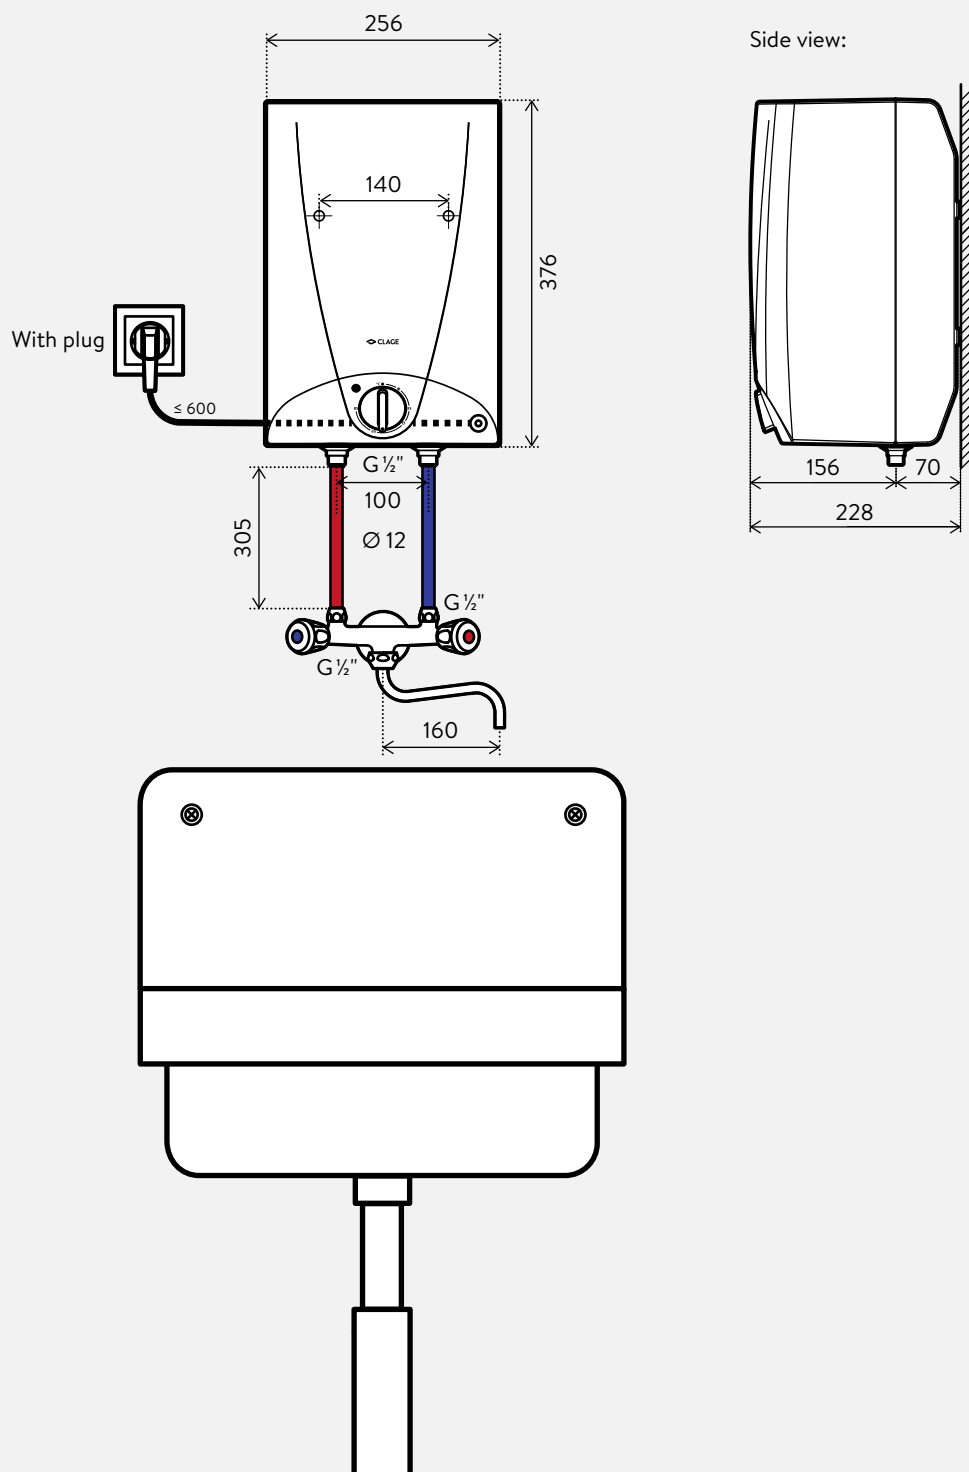

Storage water heater 5 litres  
**S5-O**  
Accessories



**Accessory recommendation for disposal sink** (optional)

**SSO** (open-outlet)

Single-lever wall mixer tap with swivel spout 20 cm

**SSO:** Part no. 4100-01250



**Accessory recommendation for disposal sink** (optional)

**SNO** (open-outlet)

Wall-mounted mixer tap with combination valve and swivel spout 16 cm

**SNO:** Part no. 4100-0110



**Aerators** (optional)

Aerator insert for tap adapter M22/24 at the tap

**CSS:** Part no. 0010-00504



Aerator with chrome tap adapter M22i  
(suitable for taps with male threads at the outlet)

**CSSi:** Part no. 89125