



Application areas Single point supply:

> Shower




Hand shower **CXH** Product information




	渝
	СХН
Part number:	0300-0086
Maximum operating pressure [MPa (bar)]:	0.8 (8)
Minimum operating pressure [MPa (bar)]:	0.02 (0.2)
Recommend operating pressure [MPa (bar)]:	0.1 – 0.5 (1 – 5)
Water connection:	G1/2"
Min. / Max. flow rate [l/min]:	3 / 12
Maximum water temperature [°C]:	70
Dimensions (length × width) [cm]:	24.2 × 9.8

Description

- > Save water at a minimum flow rate of 31/min
- > Chrome design
- > Three selectable spray types
- > Anti-limescale insert with rubber studs






[mm]

Hand shower **CXH** Product information



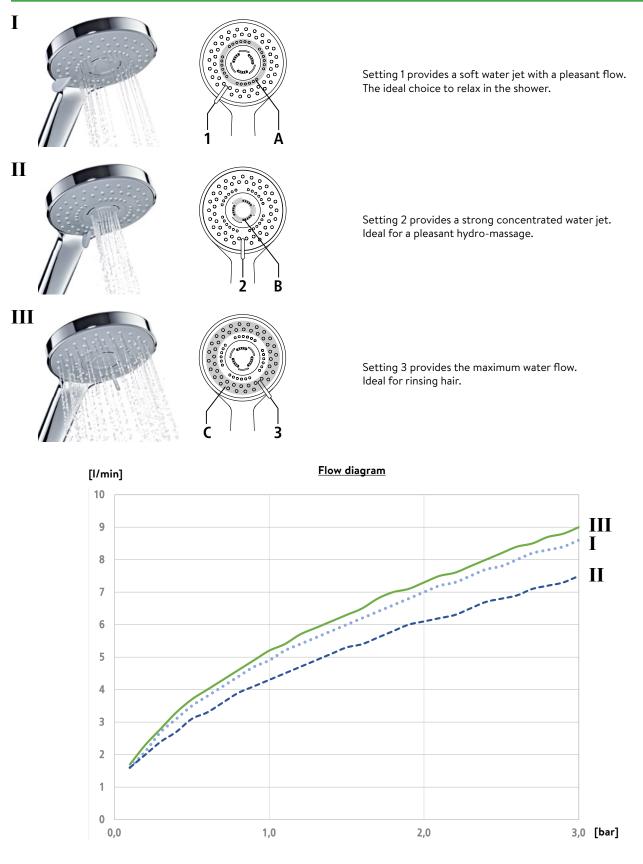

CLAGE GmbH Pirolweg 1–5 21337 Lüneburg Germany Phone +49 4131 8901-38 Fax +49 4131 2444771 export@clage.de > www.clage.com