

Water system Zip HydroTap® G5 B



Application areas

Drinking water supply for:

- > Domestic kitchens
- > Offices
- > Cafeterias / bistros
- > Restaurants / hotels



Water system

Zip HydroTap® G5 B

Product information



boiling > G5 B 60

Part number:	4100-44597
Number of users:	< 60
Water connection (thread connection):	G ½" or G ¾" *
Rated pressure [bar]:	1.7 – 7.0
Boiling water temperature, adjustable [°C]:	68 – 100
Boiling water content [litres / cups ¹⁾]:	3 / 18
Boiling water capacity [cups ¹⁾ / h]:	160
Reheating time [cups ¹⁾ / min]:	2.6
Standby power consumption [kWh / 24h]:	0.50 ²⁾
Nominal power at voltage 1~ / N / PE 230 V AC [kW]:	1.8  with plug
Compact undersink unit [colour]:	white
Protection class:	IP20
Weight (filled) [kg]:	12
Dimensions (height × width × depth) [cm]:	33.3 × 28.0 × 31.3

*) Connection hose G ½" with supplied adapter G ¾" 1) Standard cup with 167 ml 2) At 12 hours in standby mode

Description

- > Undersink water system, dispenses filtered, boiling hot water with the touch of a button
- > Touch display for menu navigation, for activating the energy saver modus and scalding protection as well as temperature setting of the water
- > Electronic temperature control
- > Easy-to-replace sub-micron particle filter cartridge with activated carbon filter, filters hazardous substances > 0.2 micron and improves the taste of water
- > Leakage protection system
- > Various electronic taps with safety function and button operation selectable

Let your Zip HydroTap® G5 B helps you!

- > Preparing tea and filtered coffee
- > Sterilising containers
- > Quickly preparing instant soups
- > Blanching
- > Peeling fruits and vegetables
- > Dissolving grease
- > Removing candle wax

Water system

Zip HydroTap® G5 B


Installation



Daily user requirements and the available space in the cabinet below the selected special tap should be considered when selecting the appropriate model.

Measurements in mm

Assembly and operating instructions must be observed upon installation.

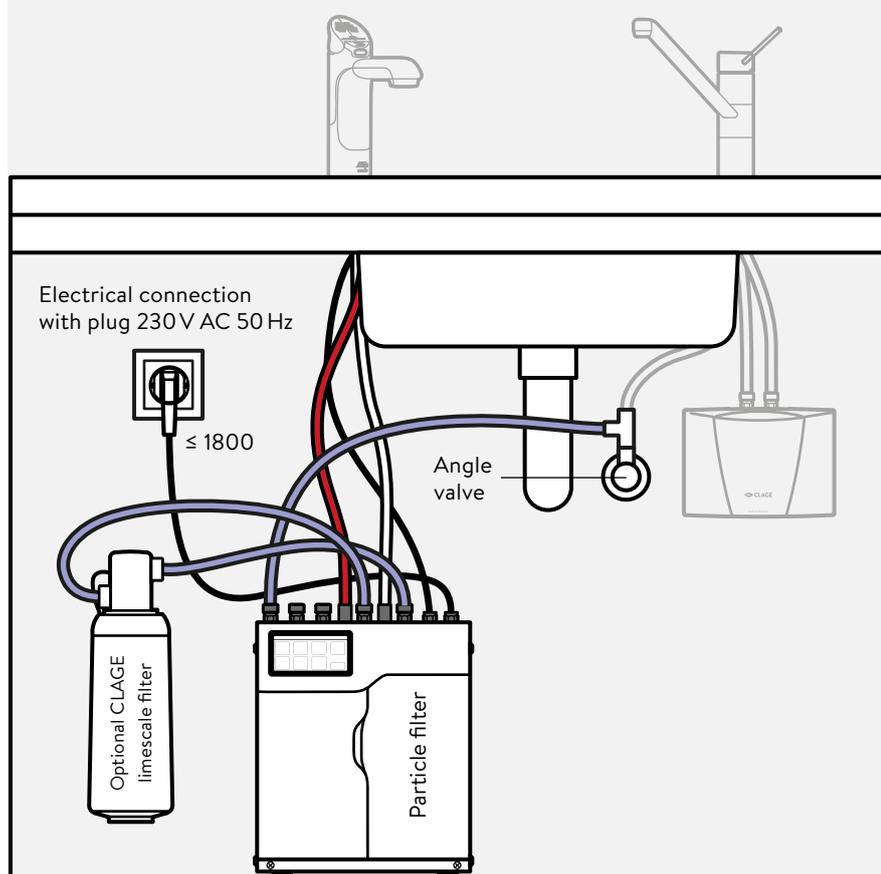

Unit dimensions:
(height × width × depth)

Zip HydroTap® G5 B 60
333 × 280 × 313 mm

Top clearance for undersink unit
(lower edge sink or drawers)
min. 200 mm

Right and left clearance for unit
min. 50 mm

Water system Zip HydroTap® G5 B Installation



Option 1: Armatur "Classic B"


Measurements in mm

For the operation of the water system Zip HydroTap® G5 B you need a suitable tap, for example the tap "Classic B".

Assembly and operating instructions must be observed upon installation.


NEW!

Now also available as **Touch-Free** option with IR sensors for no-touch operation. Requires min. 10 cm free space around the sensor head.



NEW!

Now also available as option **Classic Plus** with waterproof rubber surface and separate quantity fill button.



Drill hole diameter
for the tap

Ø 35,5


max. 50
min. 25

Ø 46

208

126

116

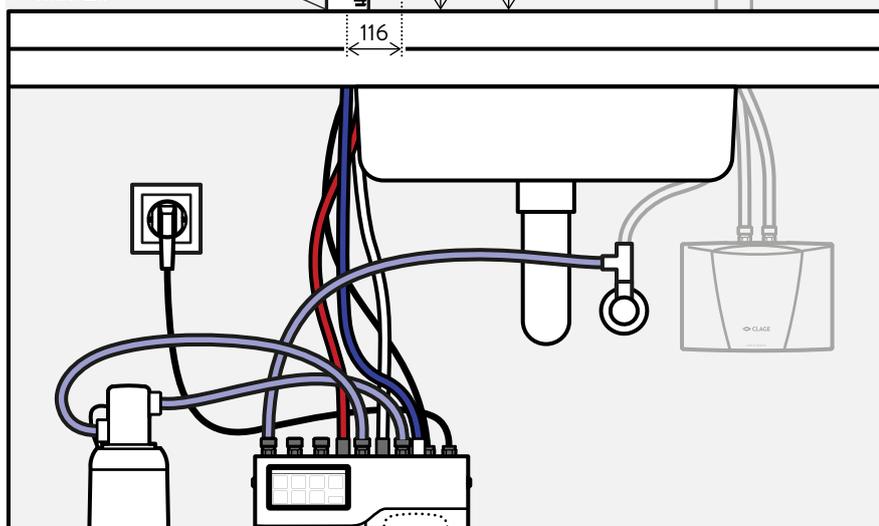

Installation at the kitchen sink



Installation as stand-alone unit

with drainage front and extension KXTV.




Water system Zip HydroTap® G5 B Installation

Option 2: Tap "Arc B"

Measurements in mm


For the operation of the water system Zip HydroTap® G5 B you need a suitable tap, for example the tap "Arc B".

Assembly and operating instructions must be observed upon installation.

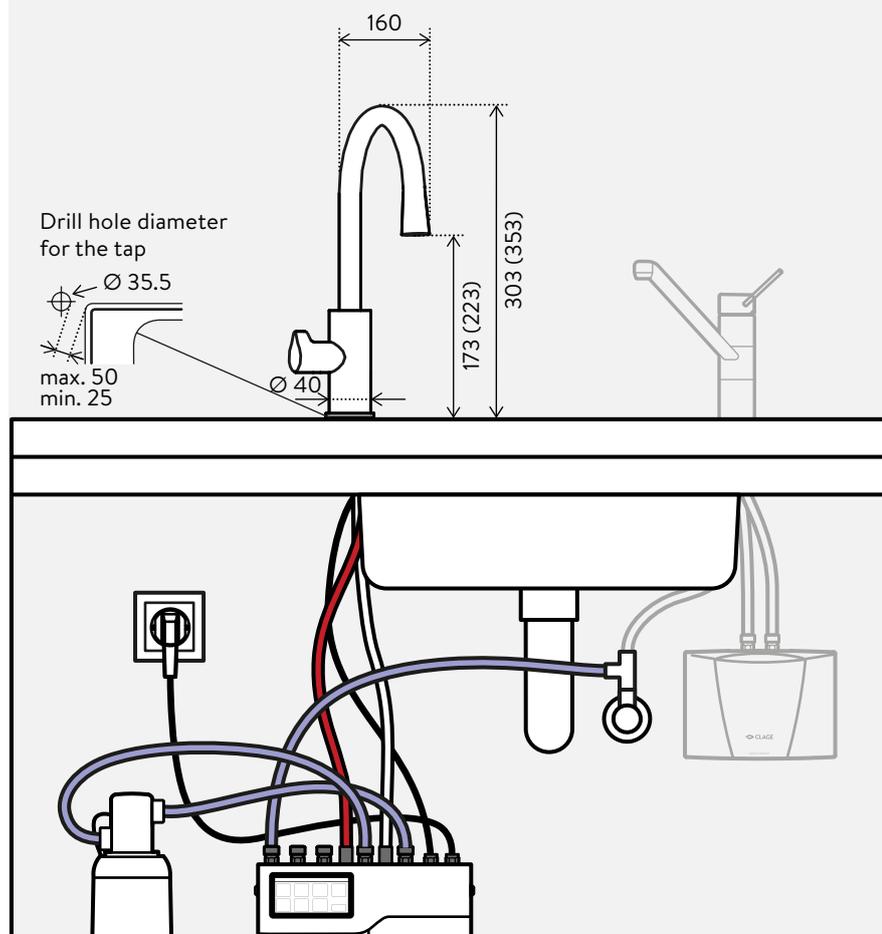

Flexible alignment

The Arc can be installed for left and right hand operation and the pipe outlet can be fixed at various angles and heights.

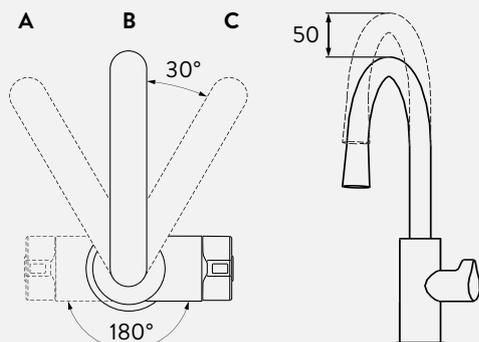

Installation as stand-alone unit with drainage font KXT.



Water system

Zip HydroTap® G5 B

Taps



Zip Classic B

Electronic dispensing tap for Zip HydroTap® B with operating keys at the top, function indicator, holding function for easy canister filling, fixed spout 12 cm, height 21 cm, drill hole with 35 mm diameter required.

Classic B, polished chrome: Part no. 4100-44512
Classic B, brushed chrome: Part no. 4100-44513
Classic B, matte black: Part no. 4100-44514



Zip Classic Plus B

Electronic dispensing tap for Zip HydroTap® B with operating keys at the top, function indicator, fill button for easy canister filling, fixed spout 12 cm, height 21 cm, drill hole with 35 mm diameter required.

Classic Plus B, polished chrome: Part no. 4100-44812
Classic Plus B, brushed chrome: Part no. 4100-44813
Classic Plus B, matte black: Part no. 4100-44814



Zip Touch-Free B

Electronic dispensing tap for Zip HydroTap® B with IR sensors and function indicator for hygienic, no-touch operation, free space of min. 10 cm around the sensor head needed, fixed spout 12 cm, height 21 cm, drill hole with 35 mm diameter required.

Touch-Free B, polished chrome: Part no. 4100-44542



Zip Arc B

Electronic dispensing tap for Zip HydroTap® B with operating lever on the side, function indicator, holding function for easy canister filling, fixed spout 16 cm, height 35.3 cm, drill hole with 35 mm diameter required.

Arc B, polished chrome: Part no. 4100-44515
Arc B, brushed chrome: Part no. 4100-44516
Arc B, matte black: Part no. 4100-44517



KXV for Classic (optional)

The optional extension for raising the electronic dispensing tap Zip Classic by 13.5 cm.

KXV , polished chrome:	Part no. 4100-44165
KXV , brushed chrome:	Part no. 4100-44166
KXV , matte black:	Part no. 4100-44167



KXTV for Classic (optional)

The optional stainless steel font with drainage connection and extension allows for flexible installation of the electronic dispensing tap at any location away from the sink. Suitable for worktops and surfaces up to 40 mm thick.

KXTV , polished chrome:	Part no. 4100-44565
KXTV , brushed chrome:	Part no. 4100-44566
KXTV , matte black:	Part no. 4100-44567



KXTV Pro for Classic / Classic Plus / Touch-Free (optional)

The optional stainless steel font with drainage connection and extension allows for flexible installation of the electronic dispensing tap at any location away from the sink. Suitable for worktops and surfaces up to 40 mm thick.

KXTV Pro , polished chrome:	Part no. 4100-44570
KXTV Pro , brushed chrome:	Part no. 4100-44571
KXTV Pro , matte black:	Part no. 4100-44572



KXT for Arc (optional)

The optional stainless steel font with drainage connection allows for flexible installation of the electronic dispensing tap at any location away from the sink. Suitable for worktops and surfaces up to 40 mm thick.

KXT , polished chrome:	Part no. 4100-44560
KXT , brushed chrome:	Part no. 4100-44561
KXT , matte black:	Part no. 4100-44562



KXF 2.1 (included)

Sub-micron particle filter cartridge filters contaminants > 0.2 microns and additionally improves the taste of the water.
For Zip HydroTap® G4 models from 02.2017.

KXF 2.1: Part no. 893702



Filter system CLARIS ULTRA for water softening (optional)

For hard, chalky water, the filter system CLARIS ULTRA is to be used (recommended from 10 °KH).

Filter head suitable for all CLARIS ULTRA-filter

Filter head Universal: Part no. 84519

Filter cartridge, capacity at 10 °KH 4.200 litre

CLARIS ULTRA 500: Part no. 84500

Filter cartridge, capacity at 10 °KH 8.500 litre

CLARIS ULTRA 1000: Part no. 84501

Filter cartridge, capacity at 10 °KH 20.000 litre

CLARIS ULTRA 2000: Part no. 84502