

Storage water heater 15 litres S15-U



Application areas

Single or multiple point supply:

- > Kitchen sink
- > Washbasin
- > Commercial wash rooms



Storage water heater 15 litres

S15-U

Product information



Energy efficiency class **A** (Scale: A+ to F) **S15-U (undersink model)**

| | |
|---|---|
| Part number: | 4100-42153 |
| Content [litres]: | 15 |
| Type; maximum operating pressure [MPa (bar)]: | unvented ¹⁾ ; 0.8 (8) |
| Water connections (thread connections): | G 3/8" |
| Temperature range [°C]: | 5 °C (5 °F) / 30 °C – 35 °C (ECO) / 55 °C / 80 °C (MAX) |
| approx. mixed water amount 40 °C ²⁾ [litres]: | 24 |
| Nominal power rating (kW): | 2.2 |
| Voltage supply [V]: | 1~ / N / PE 230 V AC |
| Nominal current [A]: | 10 |
| Heating time $\Delta t = 55 \text{ K}$ ³⁾ [min]: | 26 |
| Standby power consumption at 65 °C [kWh / 24h]: | 0.43 |
| Internal tank: | copper |
| Function indicator: | ✓ |
| Protection class: | IP 24 |
| Dimensions (height × width × depth) [cm]: | 45.2 × 30.0 × 28.5 |
| Power cable: | with plug |
| approx. weight filled with water [kg]: | 22.5 |

1) Optional installation with open-outlet tap 2) At a cold water temperature of 15 °C and a storage content temperature of 55 °C 3) Temperature increase e.g. from 15 °C to 70 °C

Description

- > Unvented 15-litre storage water heater (undersink model) for hot water supply at one or two points-of-use
- > Corrosion-proof and therefore maintenance-free internal copper tank
- > High-quality insulation keeps heat losses at a minimum
- > Temperature control approx. 5 °C to 80 °C
- > For vented installation (with open-outlet tap) and unvented installation (with safety assembly)
- > Automatic frost protection
- > Power cable with plug (~110 cm)


Storage water heater 15 litres S15-U Installation




Example of a **closed-outlet** installation with safety assembly **SGU** and single-lever mixer tap **EWT-C** for two basins.

Measurements in mm

Assembly and operating instructions must be observed upon installation.

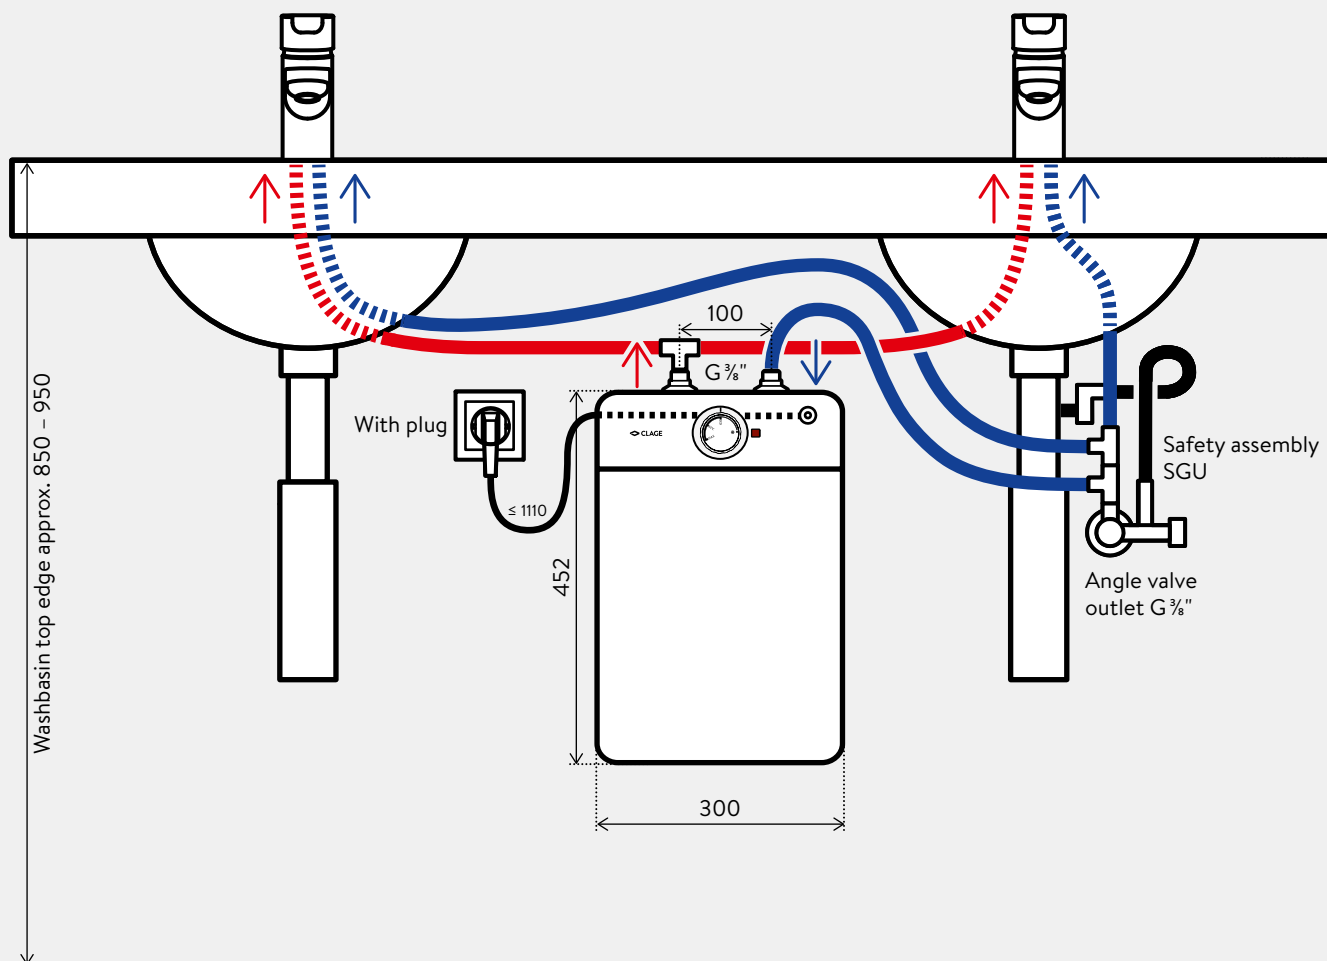

Side view:

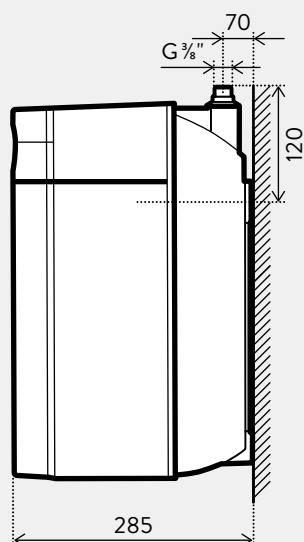


Storage water heater 15 litres S15-U Installation




Example of an **open-outlet** installation with mixer tap **SNT** for one point-of-use.
Assembly and operating instructions must be observed upon installation.

Measurements in mm

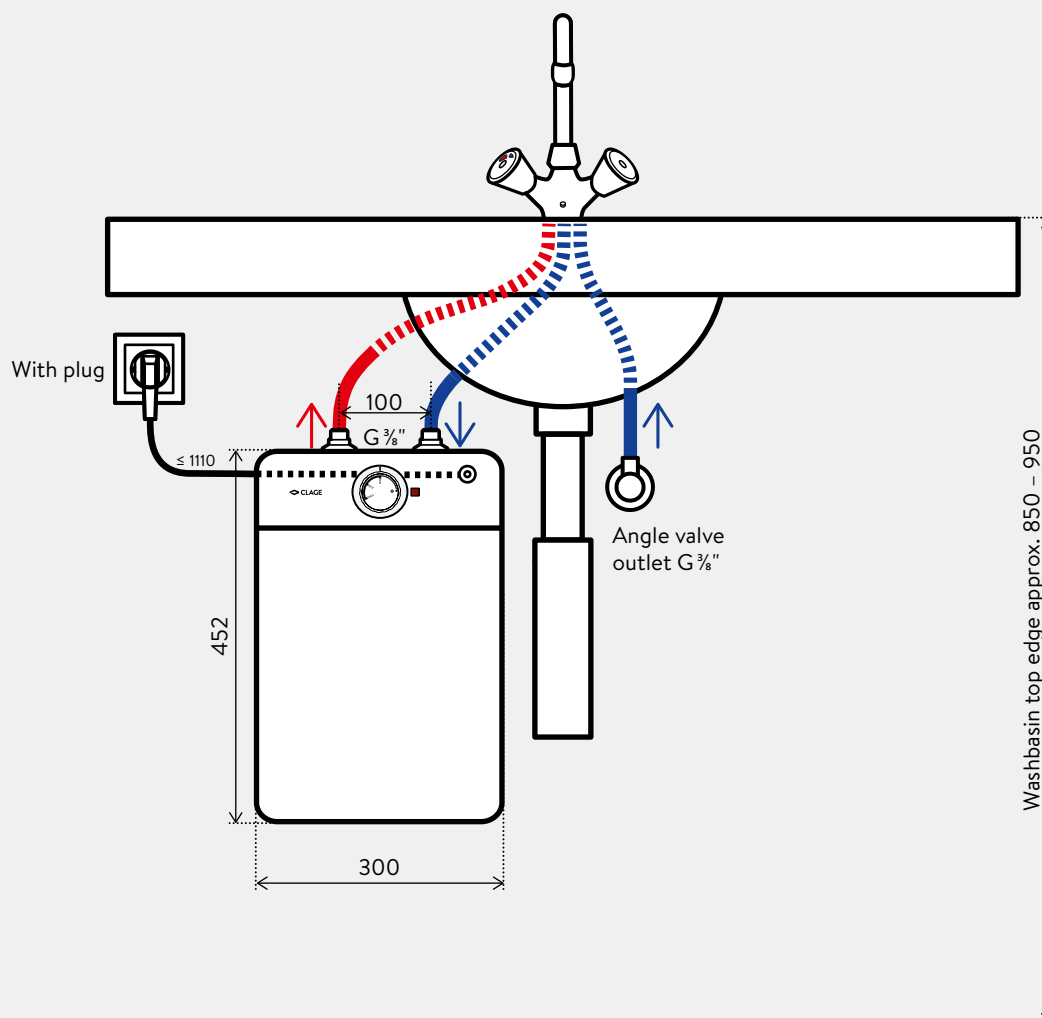

Side view:

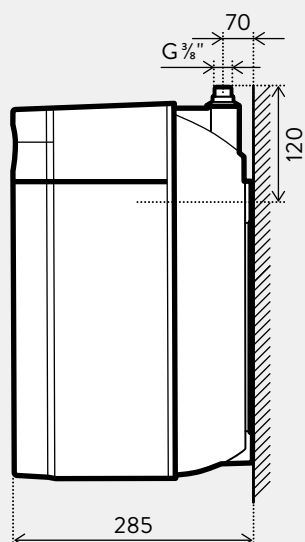

Storage water heater 15 litres S15-U Accessories



SGU (optional)

Undersink safety assembly with non-return valve, pressure reducer and flexible connecting hoses for closed-outlet installation

SGU: Part no. 4100-0013



SGUT (optional)

T-piece kit for installation of an additional tap

SGUT: Part no. 4100-0014



SNT (optional)

Two-handle temperature control mixer tap for open-outlet installation, temperature selection on the left, water volume adjustment on the right, with swivel spout 15.5 cm

SNT: Part no. 4100-0210



Aerators (optional)

Aerator insert for tap adapter M 22/24 at the tap

CSS: Part no. 0010-00504



Aerator with chrome tap adapter M 22i (suitable for taps with male threads at the outlet)

CSSi: Part no. 89125