



Application areas

Drinking water supply for:

> Domestic kitchens

> Small retail units



Subject to technical changes and version changes. Errors and omissions excepted. Date of publication: 02.18

Drinking water system **Zip HydroTap® MINIBOIL** Product information



boiling > 📛 ambient > 🗍	MINIBOIL
Part number:	4100-44260
Number of users:	< 15
Water connection (thread connection):	G ½"
Boiling water temperature [°C]:	92 - 98
Boiling water content [litres / cups 1)]:	2.1 / 12
Boiling water capacity [cups $^{1}/h$]:	120
Reheating time [cups ¹⁾ /min]:	2
Standby power consumption [kWh / 24h]:	0.38
Nominal power at voltage 1~/N/PE 230V AC [kW]:	1.84 💮 with plug
Compact undersink unit [colour]:	white
Tap [surface material]:	chrome
Protection class:	IP20
Weight (filled) [kg]:	8.3
Dimensions height × width × depth [cm]:	33.8 × 21.2 × 26.9

1) Standard cup with 167 ml

Description

- > Undersink drinking water system, dispenses and filters boiling and ambient drinking water from a single tap
- > Electronic dispensing tap featuring lever operation and safety lock for scalding protection where required
- > Locking position of the levers for convenient filling
- > Electronic temperature control
- > Easy-to-replace sub-micron particle filter cartridge with activated carbon filter, filters hazardous substances > 0.2 micron and improves the taste of water

Let your Zip HydroTap[®] MINIBOIL helps you!

- > Preparing tea and filtered coffee
- > Quickly preparing instant soups
- > Blanching
- > Peeling fruits and vegetables
- > Dissolving grease
- > Removing candle wax

> Leakage protection system


Drinking water system **Zip HydroTap® MINIBOIL** Installation



Daily user requirements and the available space in the cabinet below the special tap should be considered when selecting the appropriate model.

Measurements in mm

Assembly and operating instructions must be observed upon installation.

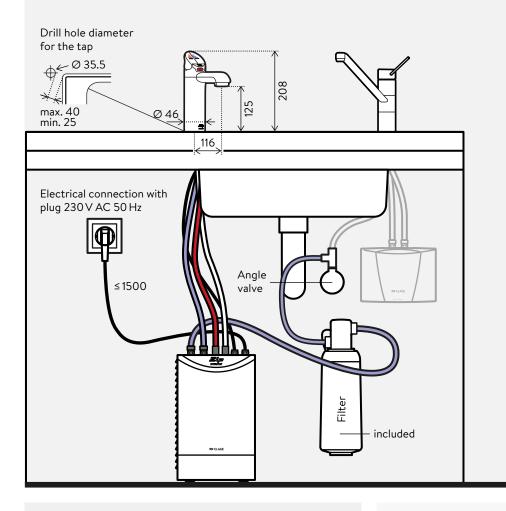


Unit dimensions: (height × width × depth)

Zip HydroTap® Miniboil 338 × 212 × 269 mm

Top clearance for undersink unit (lower edge sink or drawers) min. 200 mm

Right and left clearance for unit min. $50\,\text{mm}$





Installation as stand-alone unit with drainage font incl. extension KXTV.



Drinking water system **Zip HydroTap® MINIBOIL** Accessories







Sub-micron particle filter cartridge filters contaminants > 0.2 microns and additionally improves the taste of the water. For Zip HydroTap[®] MINIBOIL since 02.2017.

KXF1.1: Part no. 893701

Filter system CLARIS ULTRA for water softening (optional)

For hard, chalky water, the filter system CLARIS ULTRA is to be used (recommended from 10 $^{\circ}\text{KH}$).

Filter head suitable for all CLARIS ULTRA-filter **Filter head Universal:** Part no. 84519

Filter cartridge, capacity at 10 °KH 4.200 litre **CLARIS ULTRA 500:** Part no. 84500

Filter cartridge, capacity at 10 °KH 8.500 litre **CLARIS ULTRA 1000:** Part no. 84501

KXV (optional)

The optional chrome extension allows for raising the electronic dispensing tap by 10.7 cm.

Polished chrome (standard)

KXV10: Part no. 4100-44102



KXTV (optional)

The optional stainless steel font with drainage connection and chrome extension allows for flexible installation of the electronic dispensing tap at any location away from the sink.

Polished chrome (standard)

KXTV10: Part no. 4100-44111

CLAGE GmbH Pirolweg 1 – 5 21337 Lüneburg Germany Phone +49 4131 8901-38 Fax +49 4131 2444771 export@clage.de > www.clage.com