

# Shower head CXK



## Application areas

Single point supply:

> Shower



# Shower head

## CXK

### Product information



#### CXK

|   |                   |
|---|-------------------|
| Part number:                              | 0300-00880        |
| Maximum operating pressure [MPa (bar)]:   | 0.8 (8)           |
| Minimum operating pressure [MPa (bar)]:   | 0.02 (0.2)        |
| Recommend operating pressure [MPa (bar)]: | 0.1 – 0.4 (1 – 4) |
| Water connection:                         | G ½"              |
| Min. / Max. flow rate [l/min]:            | 2 / 10            |
| Maximum water temperature [°C]:           | 55                |
| Dimensions (length × width) [cm]:         | 25.0 × 5.5        |


#### Description

- > The CXK overhead shower is ideal for direct connection to a ceiling water outlet or alternatively, with the CXKA shower arm, to a ½" wall connection.
- > Save water at a minimum flow rate of 2l/min
- > Chrome design
- > Easy installation due to integrated rubber seal with filter sieve and ½" female thread
- > Anti-limescale insert with rubber studs

# Shower head CXK Installation

Example of installation.

Assembly and operating instructions must be observed upon installation.

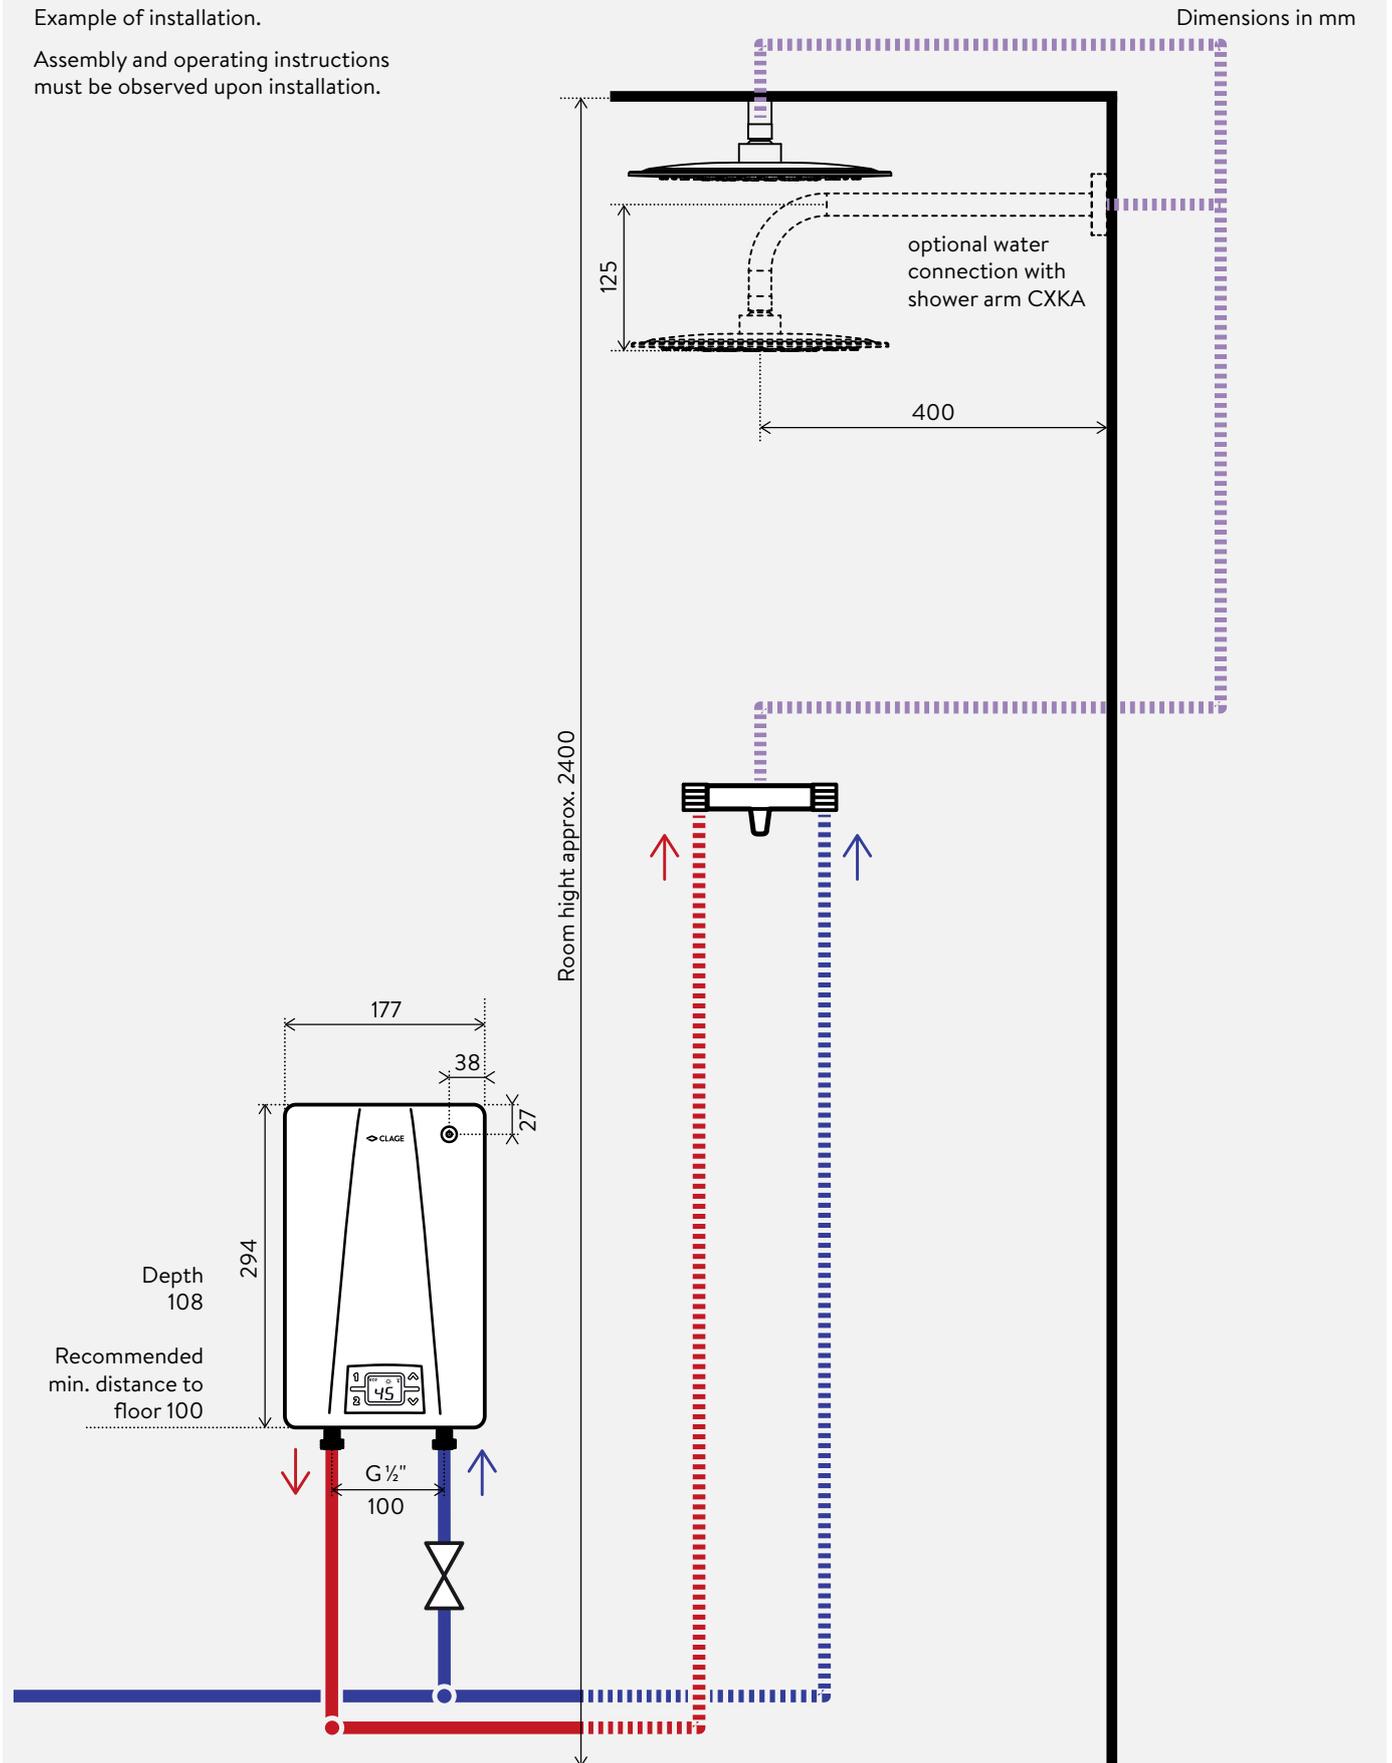



**Accessory recommendation for wall connection (optional)**

**Shower arm CXKA**

Connection pipe in chrome look with 1/2" male thread on both sides, including mounting plate, screws and dowels.  
Dimensions: length 40 cm, height 7 cm

**CXKA:** Part no. 0300-00890