New

features





Next level technology

- > Newly developed & optimized heating cartridge
- > Optimized flow characteristics
- > Electronic safety system with air bubble detection
- > Suitable for inlet water volume starting at 1.5 I/min
- > Advanced electronics with MPS®
- > New integrated safety pressure limiter and safety temperature limiter
- > Optimized actuator and electronic water stop function (DSX Touch)
- > Efficient bare wire heating system IES® reduces lime scale deposits & provides an extended service life



Easy installation

- > Easy installation thanks to free mounting space and variable connection options
- > Universal wall bracket for easy replacement of existing equipment
- > Flexible surface and flush-mounted power connection options at the top and bottom of the unit
- > IP25 water protection class



Made in Germany

Energy efficiency class A: Electronically controlled instantaneous water heaters for washbasins, the kitchen, shower and bathroom.



New

Electronically controlled comfort water heaters


Dealer stamp



CLAGE GmbH Pirolweg 4 21337 Lüneburg Germany

Phone: +49 4131 8901-888 export@clage.de www.clage.com



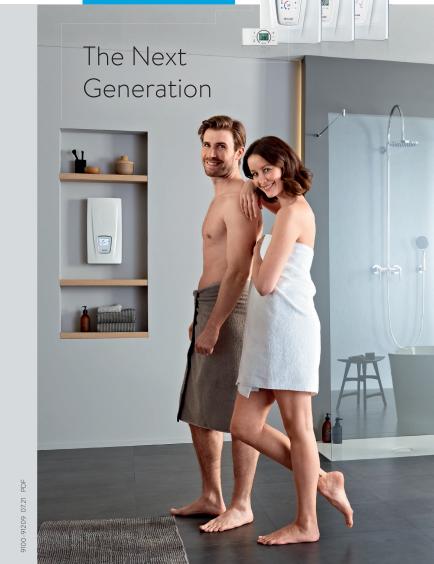

DSX Touch

Premium

DEX Next

Comfort

DCX Next Standard





Control



Bluetooth remote control (included)



Integrated Wi-Fi function

- > Fully electronically controlled premium instant water heater with real glass touch display, remote and voice control for convenient and economical hot water supply to one
- > Always precise temperatures between 20 °C and 60 °C due to TWIN TEMPERATURE Control TTC® and SERVOTRONIC® dynamic flow rate control
- > Extensive energy and consumption monitoring
- > Suitable for water saving taps
- > Electronic safety system with air bubble detection, temperature and pressure cut-off as well as water stop function
- > Function for thermal treatment with 70 °C for more hygiene
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation: DSX Touch: 18, 21, 24 or 27 kW / 400 V







remote control (optional)

- > Electronically controlled comfort instant water heater with E-Paper display and sensor keys for convenient and economical hot water supply to one or more tap(s)
- > Precise temperatures between 20 °C and 60 °C due to TWIN TEMPERATURE Control TTC® up to the full rated power output
- > Energy and consumption monitoring
- > Suitable for water saving taps
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation: DEX12 Next: 8.8 or 11.5 kW / 230 V DEX Next: 18, 21, 24 or 27 kW / 400 V



- > Electronically controlled standard instant water heater with simple operation
- > One-button operation for fast and easy five-level temperature selection: 35°C, 38°C, 42°C, 48°C and 55°C
- > TWIN TEMPERATURE Control TTC® for consistent temperature control up to the full rated power output
- > Suitable for water saving taps
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation:

DCX13 Next: 11 or 13.5 kW / 400 V DCX Next: 18, 21, 24 or 27kW / 400 V